ADJUSTABLE WRENCHES

Adjustable Wrench



Heavy-duty hardened steel wrench has a bright chrome or nickel-plated finish and is for tightening both square and hexagonal head nuts and bolts.

Has an open-end rack-and-worm adjustment. Head angle is 22-1/2 deg. Consists of frame (fixed jaw and handle), movable jaw and adjusting worm.

With a 2-1/16" jaw capacity.

5120-00-240-1414	17-1/2 to 19" length	EΑ	\$51.41
With a 1-1/8" jaw capacity.			
5120 00 449 8083	9-1/2 to 10-1/2" length	EΑ	\$10.13
With a 1-5/16" jaw capacity.			
5120-00-264-3796	11-1/2 to 12-1/2" length	EΑ	\$15.11
Has one adjustable jaw with a 2-1.	3/16 to 4-3/4" capacity.		
5120 00 277 6470	34 to 36" length	EΑ	\$540.20
With a 1-11/16" jaw capacity.			
5120 00 423 6728	14-1/2 to 15-1/2" length	EΑ	\$32.15
With a 15/16" jaw capacity.			
5120 00 240 5328	7-1/2 to 8-1/2"	EΑ	\$8.05
With a 1/2" jaw capacity.			
5120 00 240 5330	3-1/2 to 4-1/2"	EΑ	\$7.70
With a 3/4" jaw capacity.			
5120-00-264-3795	5-1/2 to 6/1/2" length	EΑ	\$7.47

Monkey wrench consists of frame, adjustable jaw and adjusting nut or screw. Jaw opens at right angle to handle.

5120-00-240-5336 10-1/4 to 13-3/4" length, 2-1/8" jaw capacity EA **\$29.23**

Automotive wrench has worm adjustment and is for use in automotive maintenance shops. Jaw opens at a right angle to the handle. Consists of frame, adjustable jaw, adjusting worm and worm-holding screw. 2-1/2" jaw capacity

5120-00-264-3793 14-1/2 to 15-1/2" length, 3-5/8" jaw capacity EA **\$34.82**

You may fax your order to us 24 hours a day, 7 days a week.

BOX WRENCHES

Box Wrench

Sizes are clearly marked on the head or handle of this double-headed wrench. Other characteristics include chamfered heads, a comfortable handgrip and chrome-plated steel composition.

Comes in 12-point style, 1/2 & 9/16". ANSI B107.6.

Short-length wrench has a deep or modified offset at each end.

5120-00-224-3154 1/2 and 9/16" openings, 5 to 6" length

EA \$8.40



Twelve-point tool has a half moon handle shank. Head is 3/8" thick.

5120-00-222-1596 9/16 and 5/8" openings 6-19/32" length EA **\$8.70**

Comes in 12-point style. ANSI B107.6

Regular-length wrench has a deep or modified offset at each end.

5120-00-224-3141 5/8 and 11/16" openings 6-19/32" minimum length EA **\$9.7**



Chromium plated, 12 point. English sizes.

10 deg. offset.

Standard.

5120 01 349 1392	P/N XB2628A	13/16 x 7/8" wrenching size	EA	\$28.73
5120 01 349 1383	P/N XB1214A	3/8 x 7/16" wrenching size	EA	\$8.24

Double-headed wrench is 12-point style and chromium plated. ANSI B107.9.

5120-01-118-4063 15 and 16mm openings, 148mm minimum length EA **\$5.28**

Has a modified offset at each end and is short length.

5120 01 116 1647	17 and 19mm openings, 156mm minimum length	EΑ	\$5.73
5120 01 113 9560	8 and 9mm openings, 101mm minimum length	EΑ	\$7.50
5120 01 113 9559	6and 7mm openings, 84mm minimum length	EΑ	\$4.40
5120 01 116 0762	18 and 20mm openings, 162mm minimum length	EΑ	\$5.93
5120 01 116 6270	13 and 14mm openings, 139mm minimum length	EΑ	\$5.09
5120 01 113 9561	9 and 10mm openings, 113mm minimum length	EΑ	\$4.40

Box Wrench Set



Chrome-plated steel box wrench set has chamfered heads and a comfortable grip. With double heads, it is 12-point size and has a deep offset at each end. Sizes are clearly marked. Comes in a plastic roll. ANSI B107.6.

Set consists of five regular-length wrenches in the following sizes: 3/8 and 7/16", 1/2 and 9/16", 5/8 and 11/16", 3/4 and 7/8" and 15/16 and 1".

5120·00·293·3453 SE \$60

What's Best Value?
"We think best value is a combination of service, quality and price, and that's how we define the Customer Supply Center program."



Find the wrench you need, when you need it. Double-headed, 12-point wrenches have a deep offset at each end. Sizes are clearly marked. Wrenches furnished in a roll or wrap. ANSI B107.9.

Set consists of eight short-length wrenches in the following sizes: 6 and 7, 8 and 9, 9 and 10, 11 and 12, 13 and 14, 15 and 16, 17 and 19, and 18 and 20mm.

5120·00·103·9782 SE \$66.57

COMBINATION WRENCHES

Combination Box and Open-End Wrench

Hardened steel combination wrench is double ended, with clearly marked identical wrenching sizes on both ends.

Chrome-plated wrench has a six- or 12-point box end that is offset 15 deg. and an open end that is angled 15 deg.. For use on square- and hexagonal-head nuts and bolts. ANSI B107.6.

5120 00 228 9514	1" openings, 11-3/8" length	EA	\$9.54
5120-00-228-9506	1/2" openings, 5-1/4" minimum length	EΑ	\$2.57
5120 00 228 9511	13/16" openings, 7·1/8" minimum length	EΑ	\$5.83
5120-00-228-9513	15/16" openings, 10·1/2" length	EΑ	\$8.12
5120 00 228 9510	3/4" openings,6-13/16" minimum length	EΑ	\$3.94
5120 00 228 9504	3/8" openings, 4·3/16" minimum length	EA	\$2.46
5120 00 228 9508	5/8" openings, 6·1/8" minimum length	EΑ	\$2.86
5120 00 228 9505	7/16" openings, 4-31/32" minimum length	EΑ	\$1.71
5120 00 228 9512	7/8" openings, 9:11/16" minimum length	EΑ	\$7.28
5120 00 228 9507	9/16" openings, 5-3/4" minimum length	EΑ	\$1.98
5120 00 277 8833	1-3/8" openings, 18" minimum length	EΑ	\$17.51
5120-00-228-9517	1-1/4" openings, 16" minimum length	EΑ	\$16.64
5120-00-228-9503	5-16" openings, 3-9/32" minimum length	EA	\$2.48

Wrench is double-ended: box end on one end and open end on the other end.
Wrench is 12-point style; 11mm or smaller may be six-point style. ANSI B107.9.

Wrench is chromium plated.

5120 01 054 7133	15mm openings, 157mm minimum length	EΑ	\$3.00
5120 01 054 7139	22mm openings, 260mm minimum length	EA	\$5.71
5120 01 054 7141	24mm openings, 304mm length	EΑ	\$6.13
5120-01-218-0841	29mm openings, 365 length	EΑ	\$13.25
5120 01 054 7140	24mm openins, 304mm minimum length	EΑ	\$6.88
5120 01 113 6294	30mm openings, 377mm length	EΑ	\$11.81
5120 01 113 6293	27mm openings, 355mm length	EΑ	\$9.70
5120 01 055 1307	26mm openings, 306mm length	EA	\$6.86
5120 01 101 4630	20mm openings, 200mm length	EΑ	\$4.34

In our on-going efforts to
fulfill your supply needs and provide
you with quality products at
cost-saving prices, we now
offer a wider range of products
than ever before. Check out
our expanded inventory!



Chromium plated, 12 point, short handle. English sizes.

5120-01-335-1283 P.N OEX140B 7/16" wrenching size EA **\$14.27**

Chromium plated, 12 point.

Standard length.

English sizes.

· ·				
5120 01 335 1230	P/N OE X1 OB	5/16" wrenching size	EΑ	\$16.00
5120 01 335 1261	P/N OE X30B	15/16" wrenching size	EA	\$33.88
5120 01 335 1229	P/N OE X8B	1/4" wrenching size	EA	\$16.00
5120 01 335 1236	P/N OE X20B	5/8" wrenching size	EA	\$16.44
5120 01 335 1235	P/N OE X18B	9/16" wrencing size	EA	\$18.83
5120 01 335 1234	P/N 0E X16B	1/2" wrenching size	EA	\$13.78
5120 01 335 1233	P/N OE X14B	7/8" wrenching size	EA	\$16.00
5120 01 335 1237	P/N OE X22B	11/16" wrenching size	EA	\$22.00
5120 01 335 1232	P/N OE X12B	3/8" wrenching size	EA	\$13.49
5120 01 335 1264	P/N 0E X36B	1-1/8" wrenching size	EA	\$52.53
5120 01 335 1266	P/N OE X40B	1-1/4" wrenching size	EΑ	\$57.69

Combination Box and Open-End Wrench Set

Combination wrenches have a box end on one end and an open end on the other. Chromium-plated wrench set is furnished in a roll or wrap.

Set consists of nine 6-point wrenches. Wrench sizes are 1/8, 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32 and 3/8".

5120·00·148·9488 SE **\$45.13**

The kit includes six 12-point wrenches of each of these sizes 7/16, 1/2, 9/16, 5/8, 11/16 and 3/4".

5120·00·148·9489 ◆ SE \$28.82

◆ Material Safety Data Sheet Available

Prices

Every attempt has been made to provide the most current prices available. Prices are updated semiannually. You will be billed at the price in effect when the order is placed.



Set consists of twenty-three 12-point wrenches (11mm or smaller wrenches may be six point.)

5120·01·176·1819 SE \$111.87



Set consists of twelve 12-point wrenches. 7/16" or smaller may be six point. The set includes: 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16 and 1".

◆ Material Safety Data Sheet Available



Set consists of nine 12-point wrenches. 7/16" or smaller wrenches may be six point. Wrench sizes are 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16 and 3/4".

5120 00 935 7310 +

◆ Material Safety Data Sheet Available

SE \$46.37

Combination wrenches have a box end on one end and an open end on the other. Set comes in a roll or wrap.

Set consists of sixteen 12-point wrenches (11mm or smaller wrenches may be six point) in the following sizes: 12 through 24, 27, 30 and 32mm. Wrenches are chromium plated.

5120·00·025·9361 SE \$134.31

Set consists of seven six-point wrenches. Wrenches are chromium plated. Set consists of wrenches in the following sizes: 4, 5, 5.5 and 6 through 9mm

5120·01·041·1585 SE \$41.89

Set consists of fourteen wrenches in the following sizes: 6 through 19mm. Wrenches are black oxide coated.

5120·01·046·4979 SE \$73.09

Set consists of nineteen 12-point wrenches (11 mm or smaller wrenches may be six point) in the following sizes: 10 through 24, 26, 27, 30 and 32mm. Wrenches are chromium plated.


5120·01·119·0010 SE \$91.20



Set consists of nine 12-point wrenches (11 mm or smaller wrenches may be six point.) Wrenches are chromium plated.

5120·00·935·7333 SE \$60.61

Combination Box and Flare Nut Wrench Set

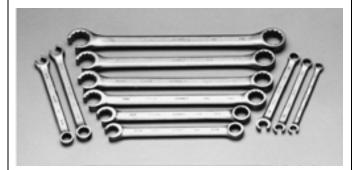

Wrenches are double headed; one end is 12-point box type and the other end is 12-point flare nut type. Wrenches are used on tube fittings and stuffing gland nuts. Have both ends same size and are chromium plated. Set consists of 11 wrenches furnished in a roll or wrap. GGG-W-645.

Set consists of 11 wrenches in the following sizes: 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 7/8, 15/16, 1 and 1-1/8". Furnished in a plastic roll. GGG-W-645.

5120·00·895·9566 SE \$264.36

FLARE NUT WRENCHES

Flare Nut Wrench (Double-Head)

Wrench tightens and loosens tube fittings and stuffing gland nuts and similar flare nuts. Double-headed, chromium-plated wrench has a nondistortion design.

Has six-point style.

5120 00 892 4947	1/2 and 9/16" openings, 7-1/2" minimum length	EΑ	\$4.46
5120 00 892 4946	3/8 and 7/16" openings, 6·1/2" minimum length	ΕA	\$3.07
5120-01-122-9392	5/8 and 3/4" openings, 9" minimum length	EΑ	\$7.01

Flare Nut Wrench Set (Metric)



Wrenches are double-headed, chromium plated and six-point style, with nondistortion design. Set consists of five wrenches furnished in a roll or wrap.

Wrench sizes are 9 and 11, 10 and 12, 13 and 14, 15 and 17 and 19 and $21\,\mathrm{mm}$


5120·00·103·9754 SE \$48.95

OPEN-END WRENCHES

Open-End Wrench (Double-Head)

Engineer's-style, chromium-plated wrench has 15 deg.-angled open ends. ANSI B107.9.

5120-01-038-0950	30 and 32 mm openings, 335mm length	EA	\$13.79
5120 01 113 9562	16 and 18mm openings, 170mm length	EA	\$4.61
5120 01 113 9563	21 and 24 mm openings, 250mm length	EΑ	\$8.08
5120 00 737 7964	8 and 10mm, 100mm minimum length	EA	\$2.65
5120 01 102 4472	19 and 22mm openings, 205mm length	EΑ	\$6.87
5120 01 102 4473	12 and 14mm openings, 150mm length	EA	\$3.69
5120 01 102 5973	11 and 13mm openings, 140mm length	EA	\$3.02
5120 01 101 1193	14 and 15mm openings, 155mm length	EA	\$3.82
5120 01 111 5305	17 and 19mm openings, 185mm length	EΑ	\$5.15
5120.01.102.5974	27 and 30mm openings, 317mm length	EΑ	\$10.91



Engineer's-style wrench has an open end angled 15 deg and is chromium plated.

American Kal P/N 4017, Armstrong Tools P/N 26-043, Snap-on Tools P/N VO1214, Stanley Proto P/N 3021-500, K-D Tools P/N 61-114FP or equal.

5120-00-277-2342 3/8 and 7/16" openings, 4-5/8 to 6-1/8" length E.A. \$2.78

Armstrong Tools P/N 26-067, Snap-on Tools P/N VO1618, Stanley Proto P/N 3026-500 or equal.

5120-00-187-7124 1/2 and 9/16" openings, 5-1/2 to 7-1/2" length E.A. **\$4.21**

American Kal P/N 4050, Armstrong Tools P/N 26-163 or equal.

5120 00 187 7133 1 and 1 1/8" openings, 10 3/4 to 13" length E.A. **\$21.6**1

K-D Tools P/N 61-126 or equal

5120 00 277 8300 11/16 and 13/16" openings, 7-1/2 to 9-1/2" length EA **\$7.80**

American Kal P/N 4031, Armstrong Tools P/N 26-094, Snap-on Tools P/N VO2022 or equal.

5120-00-277-8301 5/8 and 11/16" openings, 7 to 9" length E.A. **\$3.99**

Armstrong Tools P/N 26-058, Stanley Proto P/N 3025-500 or equal

5120-00-187-7123 7/16 and 1/2" openings, 5 to 7" length EA **\$3.99**


Snap-on Tools P/N VO4852, Stanley Proto P/N 3070, Martin Tool & Forge P/N 1041B, Armstrong Tools P/N 26-202 or equal.

5120 00 184 8439 1 1 1/2 and 1 5/8" openings, 15 1/2" length EA \$41.76

To submit an order by mail, please send it to:
GSA Customer Supply Center National Processing Center 8400 Tatum Road Palmetto, GA 30268

Economize! You save money when you buy supplies from this catalog. GSA's quantity buying reduces your costs.

Open-End Wrench Set



Engineer's-style, double-headed wrenches have open ends angled 15 deg. and are chromium plated. Set consists of five wrenches furnished in a roll or wrap and is in accordance with Snap-on Tools P/N J805AK or equal.

Opening sizes are 3/16 and 7/32", 1/4 and 9/32", 5/16 and 11/32", 3/8 and 7/16", and 7/16 and 1/2".


5120·00·449·8128 SE \$59.82

Roll or wrap holds set of eight wrenches.

Opening sizes are 13/64 and 15/64", 7/32 and 1/4", 15/64 and 13/64", 1/4 and 7/32", 9/32 and 5/16", 5/16 and 9/32", 11/32 and 3/8", and 3/8 and 11/32".

5120·00·962·7580 SE \$15.5

Open-End Wrench Set (Double-Head)

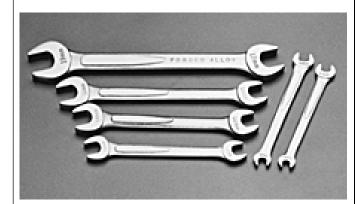

Engineer's-style wrenches have 15 deg.-angled open ends and are chromium plated. ANSI B107.9.

Set consists of six wrenches furnished in a roll or wrap. Wrenches come in the following sizes: 6 and 8, 7 and 9, 10 and 11, 12 and 14, 13 and 15 and 17 and 19mm

5120·00·906·0168 SE \$36.70




Set consists of 11 wrenches furnished in a roll or wrap

Wrenches come in the following sizes: 6 and 7, 8 and 10, 11 and 13, 12 and 14, 14 and 15, 16 and 18, 17 and 19, 19 and 22, 21 and 24, 27 and 30 and 30 and 32mm.

5120 01 115 1148 SE \$77.77

PIPE WRENCHES

Pipe Wrench (Movable Jaw)



Heavy-duty adjustable wrench has a movable jaw that opens at a 90 deg. angle from handle. Consists of a handle with a fixed steel jaw and frame, a movable steel upper jaw and a freely operating steel adjusting nut.

Has a forged aluminum alloy handle. GGG-W-651.

5120 00 277 1480	1-1/2 to 2-1/2" capacity, 24" minimum length	EΑ	\$41.33
5120-00-277-1481	2-1/2 to 3-1/2" capacity, 36" minimum length	ΕA	\$76.82
5120 00 277 1479	1 to 2" capacity, 18" minimum length	EΑ	\$26.26

Has a cast malleable iron or steel handle and is made of drop-forged steel. GGG-W-651

5120-00-270-4310		3 to 5" capacity, 48" minimum length	EΑ	\$114.92
5120-00-277-1462		1-1/2 to 2-1/2" capacity, 24" minimum length	EΑ	\$31.57
5120-00-277-1461	J WOD	1 to 2" capacity, 18" minimum length	EΑ	\$34.26
5120-00-277-1483		1/8" to 1/2" capacity, 6" minimum length	EΑ	\$9.80
5120-00-277-1485	J WOD	1/4 to 1" capacity, 10" minimum length	EΑ	\$17.86
5120 00 277 1486	J WOD	1/2 to 1-1/2" capacity, 14" minimum length	EΑ	\$23.11

Having trouble locating an item? Check the Alphabetical Index.

Pipe Wrench (Strap-Type)

Adjustable, strap-type wrench will not scratch polished pipe or tubing. Consists of a steel head with strap pin and slot, a one-piece I-beam handle and a flexible woven web strap. Strap is treated for added traction. GGG-W-651.

5120 00 262 8491

1 to 5" capacity, 30" strap, 18" length

EA \$11.11



Adjustable, strap-type wrench fits around irregularly shaped objects. Has 3/8 and 1/2" square drive ends. Nylon strap is 0.090 thick and 2" wide. Snap-on Tools P/N A91C, Granco P/N GIT-5473 or equal.

5120 00 020 2947

1 to 6" capacity, 22" strap

RATCHET WRENCHES

Ratchet Box Wrench

Double-headed, nonreversible steel wrench has a corrosion-resistant coating, a comfortable handgrip, laminated construction and riveted assembly. Clearly marked sizes. GGG-W-1405.

Has six-point style.

5120 00 831 1051

5/8 and 3/4" openings, 7.3/4" length

EA \$7.25

Ratchet Box Wrench Set



Kit offers convenience of 11 wrenches furnished in a roll or wrap.

Single-headed wrenches each have a 12-point hexagonal opening, a steel head and a steel or plastic handle. For loosening and tightening hexagonal fasteners such as tubing and hose nuts. Chrome-plated wrenches come in sizes 3/8 through 1" in 1/16" increments. Sizes are clearly marked

5120 00 474 7227

SPANNER WRENCHES

Spanner Wrench

Use on collars, rings and locknuts. Steel wrench has a corrosion-preventive coating and a comfortable grip.

Adjustable hook-type wrench has a fixed pivot point and a jaw that pivots freely. Also has a well-secured hinge pin. GGG-W-665.

Made of steel.

5120 00 288 6468

3/4 to 2" diameter capacity, 6-3/8" length

EA \$10.32



Combination hydrant and spanner wrench is adjustable. Fits pin-lug, guardlug, slot and rocker-lug hose couplings and any hydrant pentagon cap up to 1-1/4" square nut. Wrench weighs 5-1/4 lb. GGG-W-665.


5120 00 288 8849

2, 2-1/2 and 3" diameter, 18" length

EA \$43.74

SPECIAL PURPOSE WRENCHES

Crowfoot Wrench



For installing and removing the ignition wiring harness nut on an internal combustion engine. Specialized wrench has L-shaped solid bar handle with a 12point open box end that is offset 90 deg. and a 3-5/16" grab handle grip at the butt end. Forged steel. MIL-W-40145.

5120 00 795 0895

3/4" wrench opening, 10" operall length

EA \$16.53

We provide desktop delivery in 1-5 days to most customers.

TORQUE WRENCHES

Torque Screwdriver and Bit Set

Consists of a torque screwdriver with a 1/4 square female hexagonal drive; five 1/4 square drive male hexagonal bits, sizes 0.028, 0.035, 0.050, 1/16 and 5/64; three 1/4 square drive six-point sockets, sizes 3/32, 7/64 and 1/8; four 1/4 square drive flat-tip screwdriver bits, blade widths 0.080, 0.100, 0.134 and 0.185; two 1/4 square drive Phillips screwdriver bits, sizes 0 and 1; one 1/4 hexagonal x 1/4 square adapter; one miniature bit holder; one 12-point, 1/4 square drive socket with 3/16 opening; and a case with foam inserts to hold accessories. Utica Tool P/N Kit-1 or equal.

5180 01 007 8999 KT \$229.67

Torque Wrench (Deflecting Beam)

Deflecting-beam torque wrench with a scale indication of applied torque in both the clockwise and counterclockwise directions using a pointer and indicator plate. Has a nonratcheting head. ANSI B107.14.

Has a 1/4" square male driver

5120 00 618 4433

.I WAA

2 to 10 in-lb range, .5 in-lb graduation EA \$108.62

Torque Wrench (Deflecting Beam, Preset Torqu



Deflecting-beam torque wrench with an adjustment to preset the torque value in either the clockwise or counterclockwise direction. When applied torque equals the preset torque value, the wrench provides a feel impulse. Wrench can be easily preset to any torque value within its range. Has a nonratcheting head. ANSI B107.14.

Has a 3/8" square male drive.

5120-00-720-1975

25 to 100 in-lb range, 5 in-lb graduation

EA \$195.55

Torque Wrench (Dial)

Torque wrench in a rigid protective housing has an enclosed dial that indicates the applied torque in both the clockwise and counterclockwise directions. Has a nonratcheting head, unless otherwise specified, and a 1/2" male square drive. ANSI B107.14.

Has a 3/8" square male drive

5120 00 776 1841

60 to 300 in-lb range, 5 in-lb graduation

FA \$46.89

Has a 1" square male drive

5120-00-555-1521

200 to 1000 ft-lb range, 25 ft-lb graduation

EA \$401.65



Has a 3/4" male square drive.

5120-00-221-7983 120 to 600ft-lb range, 10 ft-lb graeuations

EA \$143.26

Torque Wrench (Dial, Memory Indicator)

Torque wrench in a rigid protective housing has an enclosed dial that indicates the applied torque in both the clockwise and counterclockwise directions. A memory follower indicator shows the maximum applied torque. Has a nonratcheting head. ANSI B107.14.

Has a 1/4" square male drive.

Overall length is 10".

5120-01-123-1122 7 to 3.5 N-M (6 tp 30 in-lb) range, .1 N-M (1 in-lb) graduation EA **\$169.41**

We want your comments and suggestions. Please fill out and return the Comment Card at the back of the catalog.

Torque Wrench (Limiting Screwdriver)

Screwdriver grip wrench has a micrometer adjustment for selection of preset torque values. When the preset torque value is reached, the torque wrench releases and makes an audible click. Calibrated for clockwise torquing. ANSI B107.14.

Has a 1/4" hexagonal female drive.

5120-00-943-0941	20 to 100 in-oz range, 2 in-oz graduations	EA \$110.34
5120 00 021 2041	8 to 36 in lb range, 2 in lb graduations	EA \$101.33



Has a 1/4" square male drive.

5120-00-923-9620 5 to 30 in-lb range, 1 in-lb graduation EA \$112.47

Having trouble locating an item? Check the Alphabetical Index.

Torque Wrench (Micrometer)

Torque wrench has a micrometer handle adjustment to preset the torque values. When the applied torque equals the preset torque value, the wrench temporarily releases and makes an audible click with a feel impulse. A positive locking device holds the preset torque value during use. Calibrated + 4% for clockwise torquing, and + 6% for counterclockwise torquing over the torque range. Furnished with a case. GGG-W-2843.

	drive head.	
5120-01-396-6071	30 to 150 in-lb range, 1 in-lb graduations, 3/8 size	EA \$132.37
Has a 3/4" squai	re male head.	
5120 01 374 1939	120 to 600 ft-lb range, 5ft-lb graduation	EA \$560.99
Has a 3/8" squai	re male drive.	
5120 01 374 1930	40 to 200 in lb range, 1 in lb graduation	EA \$139.57
5120 01 374 1934	20 to 100 ft-lb range, 0.5 ft-lb graduation	EA \$140.33
Has a 1/2" squai	re male drive.	
5120 01 374 1938	50 to 250 ft·lb range, 1 ft·bl graduation	\$166.08
1/4" square male	e drive.	
5120 01 374 1926	10 to 50 in-lb range, 1 in-lb graduation	EA \$123.93
5120 01 374 1928	40 to 200 in lb range, 1 in lb graduation	EA \$137.01
	· · ·	·
Has a 3/8" squai		
5120-01-374-1932	150 to 750 in-lb range, 5 in-lb graduations	EA \$147.48
Has a 1/2" squai	re male drive.	
5120 01 374 1936	30 to 150 ft·lb range, 1 ft·lb graduations	EA \$151.63
Has a fixed-drive	head.	
5120 01 396 6067	10 to 50 in-lb range, 1 in-lb graduation, 1/4" size	EA \$123.73
Has a 3/8" squar	re male drive.	
Has a 3/8" squar	re male drive. 40 to 200 in lb range, 1 in lb graduation	EA \$134.76
•	40 to 200 in-1b range, 1 in-1b graduation	EA \$134.76
5120 01 374 1929	40 to 200 in-1b range, 1 in-1b graduation	EA \$134.76
5120 01 374 1929 Has a 1/2" squar	40 to 200 in-lb range, 1 in-lb graduation	<u></u>
5120 01 374 1929 Has a 1/2" squar 5120 01 374 1937	40 to 200 in-lb range, 1 in-lb graduation Te male drive. 50 to 250 ft-lb range, 1 ft-lb graduation	EA \$164.81
5120 01 374 1929 Has a 1/2" squar 5120 01 374 1937 5120 01 396 6070	40 to 200 in-lb range, 1 in-lb graduation Te male drive. 50 to 250 ft-lb range, 1 ft-lb graduation 30 to 150 in-lb range, 2 in-lb graduations, 1/4" size 100 to 500 ft-lb range, 5 ft-lb graduations, 3/4" size	EA \$164.81 EA \$127.66
5120 01 374 1929 Has a 1/2" squar 5120 01 374 1937 5120 01 396 6070 5120 01 396 6072	40 to 200 in-lb range, 1 in-lb graduation Te male drive. 50 to 250 ft-lb range, 1 ft-lb graduation 30 to 150 in-lb range, 2 in-lb graduations, 1/4" size 100 to 500 ft-lb range, 5 ft-lb graduations, 3/4" size	EA \$164.81 EA \$127.66
5120 01 374 1929 Has a 1/2" square 5120 01 374 1937 5120 01 396 6070 5120 01 396 6072 1/4" square male	40 to 200 in-lb range, 1 in-lb graduation Te male drive. 50 to 250 ft-lb range, 1 ft-lb graduation 30 to 150 in-lb range, 2 in-lb graduations, 1/4" size 100 to 500 ft-lb range, 5 ft-lb graduations, 3/4" size te drive. 40 to 200 in-lb range, 1 in-lb graduation	EA \$164.81 EA \$127.66 EA \$490.22
5120 01 374 1929 Has a 1/2" square 5120 01 374 1937 5120 01 396 6070 5120 01 396 6072 1/4" square male 5120 01 374 1927	40 to 200 in-lb range, 1 in-lb graduation Te male drive. 50 to 250 ft-lb range, 1 ft-lb graduation 30 to 150 in-lb range, 2 in-lb graduations, 1/4" size 100 to 500 ft-lb range, 5 ft-lb graduations, 3/4" size te drive. 40 to 200 in-lb range, 1 in-lb graduation	EA \$164.81 EA \$127.66 EA \$490.22
5120-01-374-1929 Has a 1/2" squat 5120-01-374-1937 5120-01-396-6070 5120-01-396-6072 1/4" square male 5120-01-374-1927 Has a 3/8" squat	40 to 200 in-lb range, 1 in-lb graduation The male drive. 50 to 250 ft-lb range, 1 ft-lb graduation 30 to 150 in-lb range, 2 in-lb graduations, 1/4" size 100 to 500 ft-lb range, 5 ft-lb graduations, 3/4" size the drive. 40 to 200 in-lb range, 1 in-lb graduation The male drive.	EA \$164.81 EA \$127.66 EA \$490.22 EA \$131.13
5120-01-374-1929 Has a 1/2" square 5120-01-374-1937 5120-01-396-6070 5120-01-396-6072 1/4" square male 5120-01-374-1927 Has a 3/8" square 5120-01-374-1931	40 to 200 in-lb range, 1 in-lb graduation re male drive. 50 to 250 ft-lb range, 1 ft-lb graduation 30 to 150 in-lb range, 2 in-lb graduations, 1/4" size 100 to 500 ft-lb range, 5 ft-lb graduations, 3/4" size e drive. 40 to 200 in-lb range, 1 in-lb graduation re male drive. 150 to 750 in-lb range, 5 in-lb graduations 30 to 150 in-lb range, 1 in-lb graduations, 3/8 size	EA \$164.81 EA \$127.66 EA \$490.22 EA \$131.13
5120-01-374-1929 Has a 1/2" square 5120-01-374-1937 5120-01-396-6070 5120-01-396-6072 1/4" square male 5120-01-374-1927 Has a 3/8" square 5120-01-374-1931 5120-01-374-1931	40 to 200 in-lb range, 1 in-lb graduation re male drive. 50 to 250 ft-lb range, 1 ft-lb graduation 30 to 150 in-lb range, 2 in-lb graduations, 1/4" size 100 to 500 ft-lb range, 5 ft-lb graduations, 3/4" size e drive. 40 to 200 in-lb range, 1 in-lb graduation re male drive. 150 to 750 in-lb range, 5 in-lb graduations 30 to 150 in-lb range, 1 in-lb graduations, 3/8 size head.	EA \$164.81 EA \$127.66 EA \$490.22 EA \$131.13